


Panel Printer



PORTI-P40/PP40

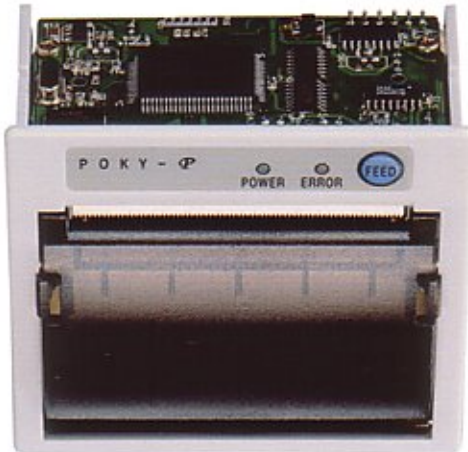

General Features

ISO 9001



- Compact size
- Very silent printing thru direct thermal printing method
- High speed (50mm/sec)
- High resolution (203dpi:8dots/mm)
- Easier paper loading with CLAMSHELL design
- Supports text and graphic printing
- RS-232C [TTL] Interface (PORTI-P40)
- RS-232C [TTL] & Parallel Interface (PORTI-PP40)
- Easier maintenance with self-diagnostics

Application

Medical analyzer, Industrial instrument, Recorder,
Geological analyzer, Underground analyzer,
Chemical analyzer, Metallic analyzer, etc.



Technical Specification

Item	Specification
Printing	Direct thermal printing
Characters per line	42cpl
Character size	English : 9 × 24dots, 12 × 24dots Korean : 16 × 24dots [24 × 24dots]
Resolution	203dpi, 8dots/mm
Print width	2-inch (48mm, 384dots)
Printing speed	50mm/sec
Interfaces	P40 : RS-232C [TTL] PP40 : RS-232C [TTL] & Parallel
Dimensions (W × D × H)	P40 : 80 × 75 × 45mm PP40 : 80 × 75 × 55mm
Weight	P40 : 160g (including roll paper) PP40 : 180g (including roll paper)
Paper supplied	Thermal roll paper, label roll (57mm wide, 40mm ϕ)
Barcode supported	PDF417 (2-dimension), Code39, Code93, Code128, UPC, EAN, KAN, JAN, CODABAR, ITF

※The appearance and specification of the product would be changed without notice in order to improve it.
The production may be a little bit different from the real situation.